


Slotted Fillister Head Screws
To ANSI B18.6.3

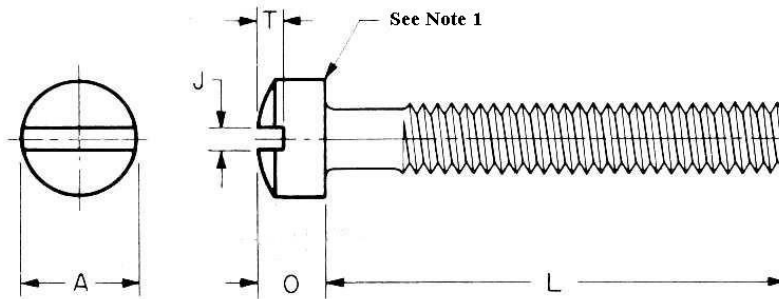

Dimensional Data

Thread Size	T.P.I UNC	T.P.I UNF	Head Diameter (Max) A	Head Height (Max) O	Slot Width (Max) J	Slot Depth (Max) T
0		80	0.096	0.055	0.023	0.025
1	64	72	0.118	0.066	0.026	0.031
2	56	64	0.140	0.083	0.031	0.037
3	48	56	0.161	0.095	0.035	0.043
4	40	48	0.183	0.107	0.039	0.048
5	40	44	0.205	0.120	0.043	0.054
6	32	40	0.226	0.132	0.048	0.060
8	32	36	0.270	0.156	0.054	0.071
10	24	32	0.313	0.180	0.060	0.083
12	24	28	0.357	0.205	0.067	0.094
1/4	20	28	0.414	0.237	0.075	0.109
5/16	18	24	0.518	0.295	0.084	0.137
3/8	16	24	0.622	0.355	0.094	0.164
7/16	14	20	0.625	0.368	0.094	0.170
1/2	13	20	0.750	0.412	0.106	0.190
5/8	11	18	0.875	0.521	0.133	0.240
3/4	10	16	1.000	0.612	0.149	0.281