


**Raised Countersunk**  
**Slot & Phillips To ANSI B18.6.3**

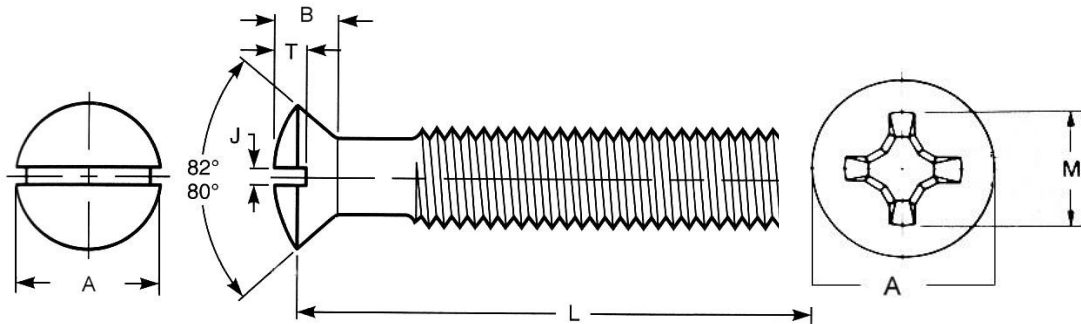

**Dimensional Data**

Thread Size	T.P.I UNC	T.P.I UNF	Head Diameter (Max) A	Head Diameter (Min) A	Head Height B	Slot Width (Max) J	Slot Depth (Max) T	Recess Diameter M	Driver Size
0		80	0.112	0.096	0.056	0.023	0.030	0.068	0
1	64	72	0.137	0.120	0.068	0.026	0.038	0.070	0
2	56	64	0.162	0.144	0.080	0.031	0.045	0.106	1
3	48	56	0.187	0.167	0.092	0.035	0.052	0.118	1
4	40	48	0.212	0.191	0.104	0.039	0.059	0.130	1
5	40	44	0.237	0.215	0.116	0.043	0.067	0.152	2
6	32	40	0.262	0.238	0.128	0.048	0.074	0.172	2
8	32	36	0.312	0.285	0.152	0.054	0.088	0.186	2
10	24	32	0.362	0.333	0.176	0.060	0.103	0.202	2
12	24	28	0.412	0.380	0.200	0.067	0.117	0.264	3
1/4	20	28	0.477	0.442	0.232	0.075	0.136	0.284	3
5/16	18	24	0.597	0.556	0.290	0.084	0.171	0.384	4
3/8	16	24	0.717	0.670	0.347	0.094	0.206	0.404	4
7/16	14	20	0.760	0.715	0.345	0.094	0.210	0.416	4
1/2	13	20	0.815	0.765	0.354	0.106	0.216	0.430	4
5/8	11	18	1.050	0.890	0.410	0.133	0.285	0.580	5
3/4	10	16	1.285	1.215	0.467	0.149	0.353	0.642	5