


**Slotted Round Head Screws**  
**To ANSI B18.6.3**

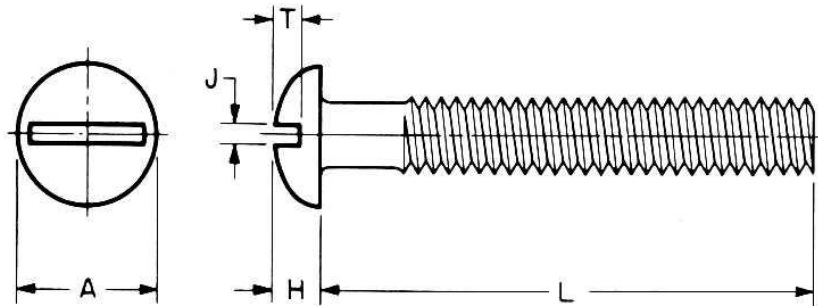

**Dimensional Data**

Thread Size	T.P.I UNC	T.P.I UNF	Head Diameter (Max) A	Head Height (Max) H	Slot Width (Max) J	Slot Depth (Max) T
<b>0</b>		80	0.113	0.053	0.023	0.039
<b>1</b>	64	72	0.138	0.061	0.026	0.044
<b>2</b>	56	64	0.162	0.069	0.031	0.048
<b>3</b>	48	56	0.187	0.078	0.035	0.053
<b>4</b>	40	48	0.211	0.086	0.039	0.058
<b>5</b>	40	44	0.236	0.095	0.043	0.063
<b>6</b>	32	40	0.260	0.103	0.048	0.068
<b>8</b>	32	36	0.309	0.120	0.054	0.077
<b>10</b>	24	32	0.359	0.137	0.060	0.087
<b>12</b>	24	28	0.408	0.153	0.067	0.096
<b>1/4</b>	20	28	0.472	0.175	0.075	0.109
<b>5/16</b>	18	24	0.590	0.216	0.084	0.132
<b>3/8</b>	16	24	0.708	0.256	0.094	0.155
<b>7/16</b>	14	20	0.750	0.328	0.094	0.196
<b>1/2</b>	13	20	0.813	0.355	0.106	0.211
<b>5/8</b>	11	18	1.000	0.438	0.133	0.258
<b>3/4</b>	10	16	1.250	0.547	0.149	0.320