


Slotted Countersunk Head Screws
To ANSI B18.6.3

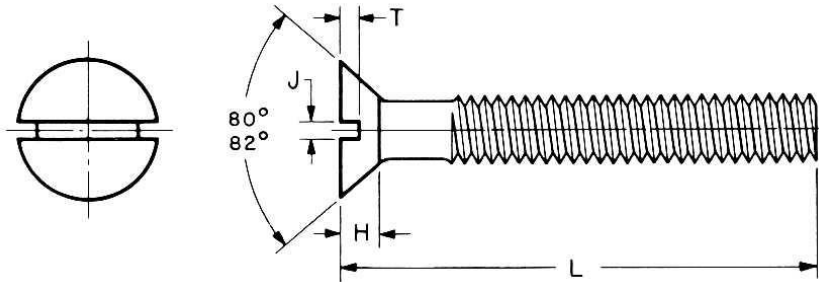

Dimensional Data

Thread Size	T.P.I UNC	T.P.I UNF	Head Diameter (Max)	Head Diameter (Min)	Head Height (Max) H	Slot Width (Max) J	Slot Depth (Max) T	See Note 1
0		80	0.119	0.099	0.035	0.023	0.015	1/8
1	64	72	0.146	0.123	0.043	0.026	0.019	1/8
2	56	64	0.172	0.147	0.051	0.031	0.023	1/8
3	48	56	0.199	0.171	0.059	0.035	0.027	1/8
4	40	48	0.225	0.195	0.067	0.039	0.030	3/16
5	40	44	0.252	0.220	0.075	0.043	0.034	3/16
6	32	40	0.279	0.244	0.083	0.048	0.038	3/16
8	32	36	0.332	0.292	0.100	0.054	0.045	1/4
10	24	32	0.385	0.340	0.116	0.060	0.053	5/16
12	24	28	0.438	0.389	0.132	0.067	0.060	3/8
1/4	20	28	0.507	0.452	0.153	0.075	0.070	7/16
5/16	18	24	0.635	0.568	0.191	0.084	0.088	1/2
3/8	16	24	0.762	0.685	0.230	0.094	0.106	9/16
7/16	14	20	0.812	0.723	0.223	0.094	0.103	5/8
1/2	13	20	0.875	0.775	0.223	0.106	0.103	3/4
5/8	11	18	1.125	1.002	0.298	0.133	0.137	
3/4	10	16	1.375	1.230	0.372	0.149	0.171	