


Phillips Countersunk Head Screws
To ANSI B18.6.3

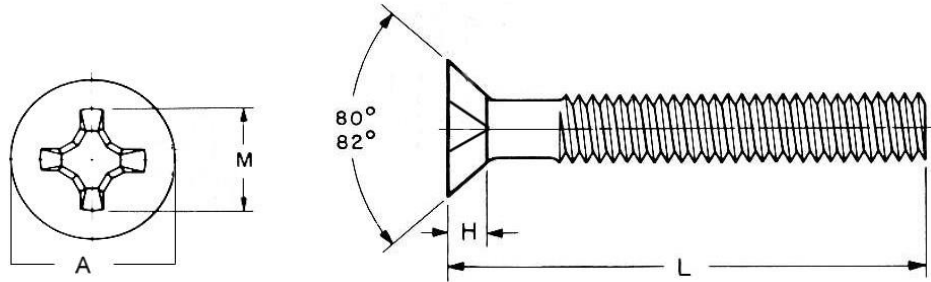

Dimensional Data

Thread Size	T.P.I UNC	T.P.I UNF	Head Diameter (Max) A	Head Diameter (Min) A	Head Height (Ref) H	Recess Diameter (Max) M	Recess Depth (Max)	Driver Size
0		80	0.119	0.099	0.035	0.069	0.043	0
1	64	72	0.146	0.123	0.043	0.077	0.051	0
2	56	64	0.172	0.147	0.051	0.102	0.063	1
3	48	56	0.199	0.171	0.059	0.107	0.068	1
4	40	48	0.225	0.195	0.067	0.128	0.089	1
5	40	44	0.252	0.220	0.075	0.154	0.086	2
6	32	40	0.279	0.244	0.083	0.174	0.106	2
8	32	36	0.332	0.292	0.100	0.189	0.121	2
10	24	32	0.385	0.340	0.116	0.204	0.136	2
12	24	28	0.438	0.389	0.132	0.268	0.156	3
1/4	20	28	0.507	0.452	0.153	0.283	0.171	3
5/16	18	24	0.635	0.568	0.191	0.365	0.216	4
3/8	16	24	0.762	0.685	0.230	0.393	0.245	4
7/16	14	20	0.812	0.723	0.223	0.409	0.261	4
1/2	13	20	0.875	0.775	0.223	0.424	0.276	4
5/8	11	18	1.125	1.002	0.298	0.576	0.342	5
3/4	10	16	1.375	1.23	0.372	0.64	0.406	5